

Specialty Grouts and Cements

J-Plug Grout

Jennchem's J-Plug Grout is a pumpable cementitious grout designed for use in void filling applications and plugging of gas drainage holes.

Features:

- High volume output
- Non-shrink.
- Thixotropic
- Rapid setting

Application:


- Use a high shear mixer and potable water
- Water addition-8.5L per 15Kg bag
- Once mixed the product is rapid setting
- Wash all equipment and pumping lines immediately after use

Yield:

- One 15 Kg bag will typically yield 12.5 litres of grout

Packaging:

- 15Kg bags - 72 bags per pallet

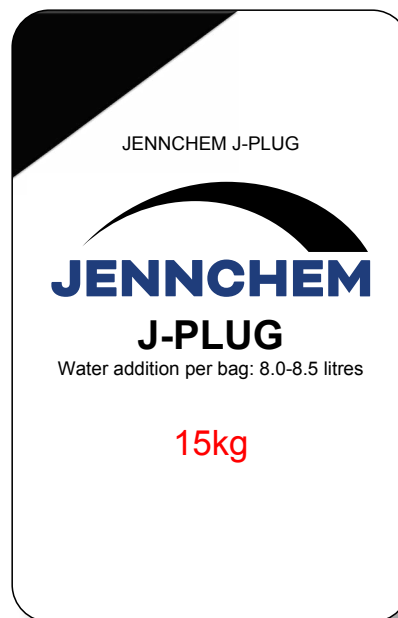

Technical Data – J-PLUG GROUT

Water:powder	Pot Life	Initial set time	Wet Density
0.56 :1	15-20 mins	30-40 mins	1850 Kg/m ³

UNIAXIAL COMPRESSIVE STRENGTH (MPa)

1 Day	7 Days	28 Days
3.5	10	20