

GROUTS


# JENNCHEM TOP-DOWN-80 GROUT

## Features

- High strength 80 MPa *thixotropic* cable bolt grout for “top-down” grouting
- Ready to use, mix with water and pump
- Non shrink, unique expansion system compensates for shrinkage
- Excellent pumpability
- Typically used with TGBolt, Bulbed Superstrand and other “top-down” grouted cable bolts

## Packaging

- Durable water proof 20kg bags for use in remote and harsh underground mining environments
- 56 bags per pallet, 1.2 tonne per pallet

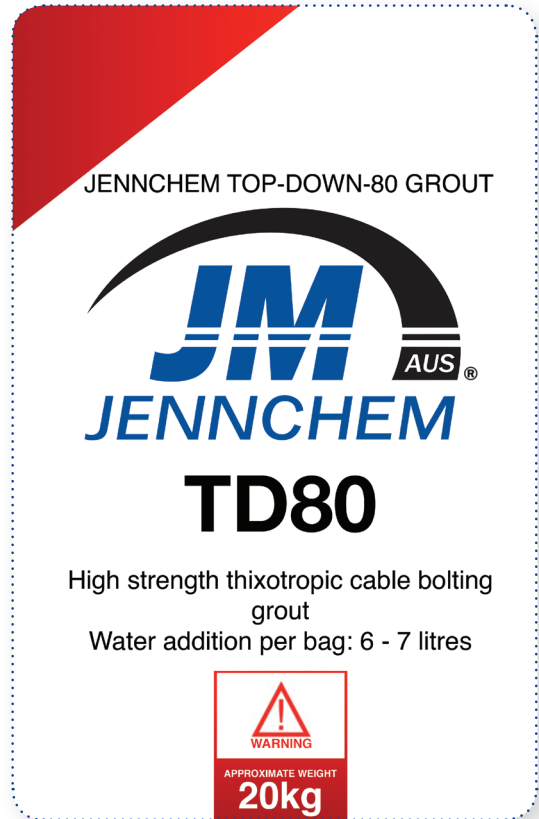

Uniaxial Compressive Strength* (MPa)			
	1 day	7 days	28 days
6 litres/bag	43	77	89
7 litres/bag	33	63	80

\*UCS independent test results were obtained using 50 x 50mm cubes

Water : Grout Mix	6 - 7 litres per bag
Estimated Yield	13 - 14 litres per bag